

 Kabelverbinders geïsoleerd met versterkingshuls
 Pre insulated terminal with anti vibration insert
 Kabelverbinder isoliert mit Verstärkungshülse
 Cosse pré-isolée renforcée

DIN 0.5 - 1.5 mm²
 AWG 22 - 16 mm²
 Nylon / Polyamide - DIN / ISO 46 245
 Max. Electrical Rating: 300 Volts - 105°C

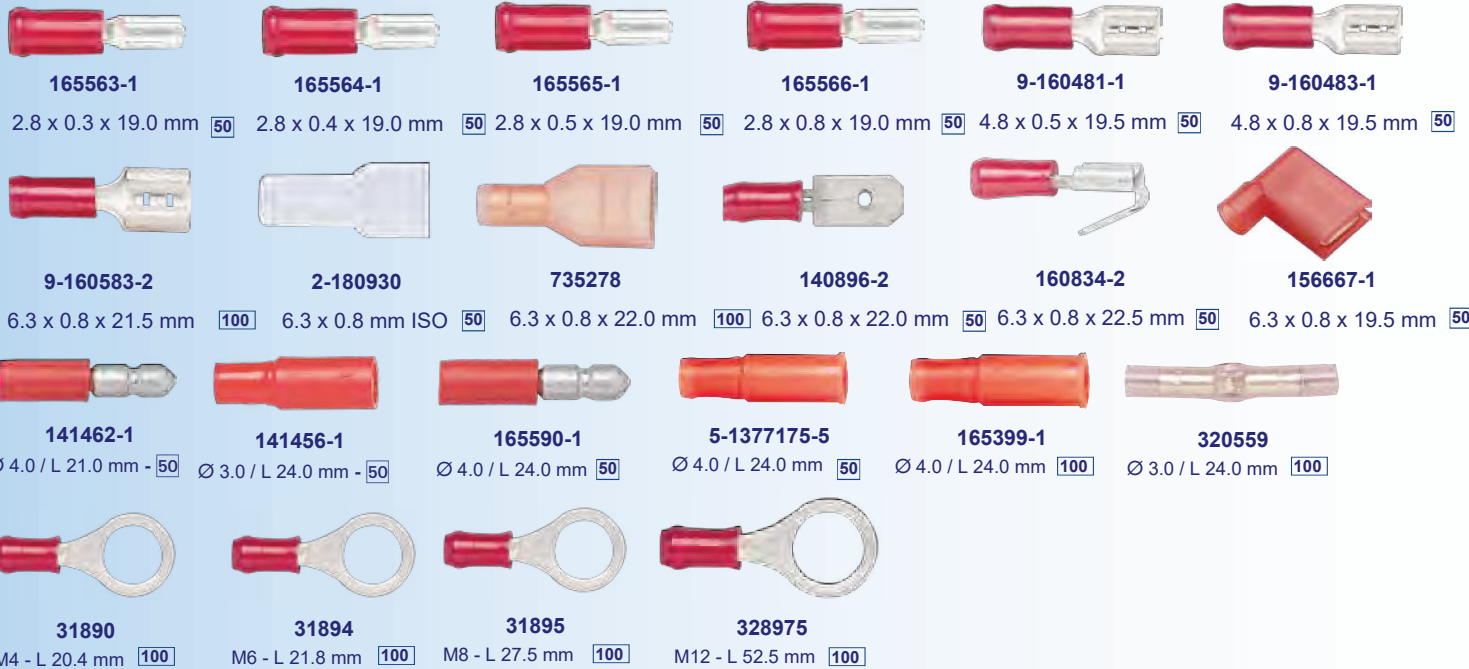

165563-1

165564-1

165565-1

165566-1

9-160481-1

9-160483-1

2.8 x 0.3 x 19.0 mm [50] 2.8 x 0.4 x 19.0 mm [50] 2.8 x 0.5 x 19.0 mm [50] 2.8 x 0.8 x 19.0 mm [50] 4.8 x 0.5 x 19.5 mm [50] 4.8 x 0.8 x 19.5 mm [50]

9-160583-2

2-180930

735278

140896-2

160834-2

156667-1

6.3 x 0.8 x 21.5 mm [100] 6.3 x 0.8 mm ISO [50] 6.3 x 0.8 x 22.0 mm [100] 6.3 x 0.8 x 22.0 mm [50] 6.3 x 0.8 x 22.5 mm [50] 6.3 x 0.8 x 19.5 mm [50]

141462-1

141456-1

165590-1

5-1377175-5

165399-1

320559

Ø 4.0 / L 21.0 mm - [50] Ø 3.0 / L 24.0 mm - [50] Ø 4.0 / L 24.0 mm [50] Ø 4.0 / L 24.0 mm [50] Ø 4.0 / L 24.0 mm [100] Ø 3.0 / L 24.0 mm [100]


31890

31894


31895

328975

M4 - L 20.4 mm [100] M6 - L 21.8 mm [100] M8 - L 27.5 mm [100] M12 - L 52.5 mm [100]

 Kabelverbinders geïsoleerd zonder versterkingshuls
 Pre insulated terminal without anti vibration insert
 Kabelverbinder isoliert ohne Verstärkungshülse
 Cosse pré-isolée non renforcée

DIN 0.5 - 1.5 mm²
 AWG 22 - 16 mm²
 Nylon / Polyamide - DIN / ISO 46 245 Max.
 Electrical Rating: 300 Volts - 105°C

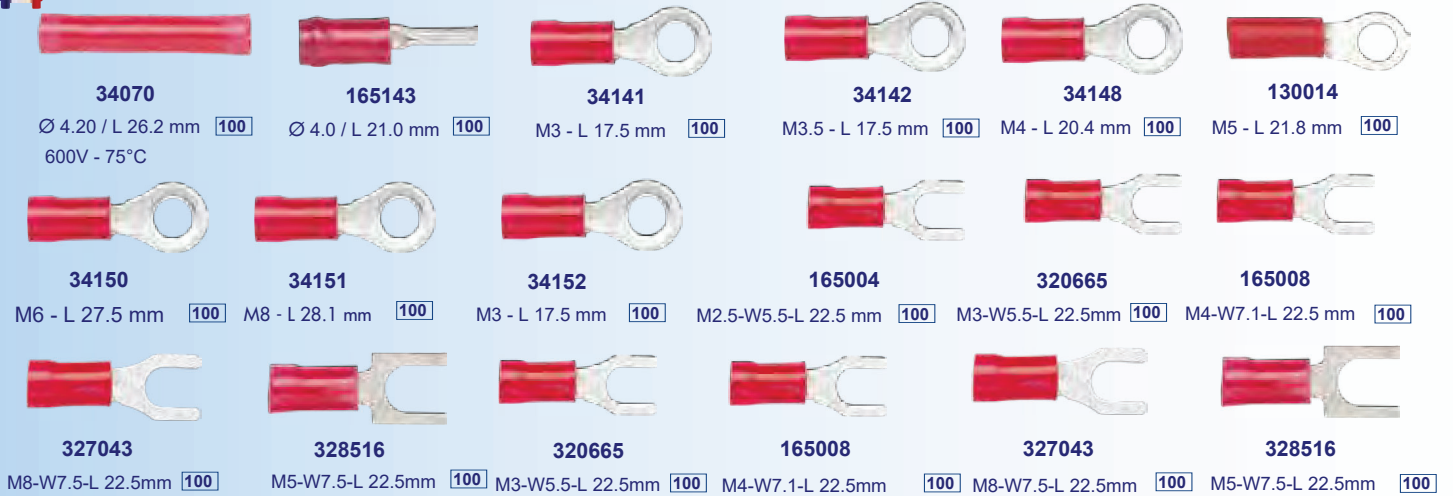

34070

165143

34141

34142

34148

130014

Ø 4.20 / L 26.2 mm [100] Ø 4.0 / L 21.0 mm [100] M3 - L 17.5 mm [100] M3.5 - L 17.5 mm [100] M4 - L 20.4 mm [100] M5 - L 21.8 mm [100]
 600V - 75°C

34150

34151

34152

165004

320665

165008

M6 - L 27.5 mm [100] M8 - L 28.1 mm [100] M3 - L 17.5 mm [100] M2.5-W5.5-L 22.5 mm [100] M3-W5.5-L 22.5mm [100] M4-W7.1-L 22.5 mm [100]

327043

328516


320665

165008

327043

328516

M8-W7.5-L 22.5mm [100] M5-W7.5-L 22.5mm [100] M3-W5.5-L 22.5mm [100] M4-W7.1-L 22.5mm [100] M8-W7.5-L 22.5mm [100] M5-W7.5-L 22.5mm [100]

 Kabelverbinders geïsoleerd met versterkingshuls
 Pre insulated terminal with anti vibration insert
 Kabelverbinder isoliert mit Verstärkungshülse
 Cosse pré-isolée renforcée

DIN 1.5 - 2.5 mm²
 AWG 16 - 14 mm²
 Nylon / Polyamide - DIN / ISO 46 245
 Max. Electrical Rating: 300 Volts - 105°C



165615-2

9-160477-2

9-160479-2

320863

9-160313-2

9-160326-2

2.8 x 0.4 x 20.5 mm [100] 4.8 x 0.5 x 20.5 mm [100] 4.8 x 0.8 x 20.5 mm [100] 8 x 0.8 x 20.5 mm [100] 6.3 x 0.8 x 20.5 mm [100] 8.0 x 0.8 x 24.5 mm [100]

2-180930

9-160463-2





140971-2

735160

320562

34071

6.3 x 0.8 mm ISO [50] 6.3 x 0.8 x 22.5 mm [50] 6.3 x 0.8 x 22.5 mm [50] 6.3 x 0.8 x 24.0 mm [100] 5.2/L27.0 mm 600V-75°C [50] 8.0 x 0.8 x 24.5 mm [50]

-  Kabelverbinders geïsoleerd met versterkingshuls
-  Pre insulated terminal with anti vibration insert
-  Kabelverbinder isoliert mit Verstärkungshülse
-  Cosse pré-isolée renforcée

DIN 1.5 - 2.5 mm²
 AWG 16 - 14 mm²
 Nylon / Polyamide - DIN / ISO 46 245
 Max. Electrical Rating: 300 Volts - 105°C



141452-1

Ø 3.0 / L 21.5 mm [50]

141460-1

Ø 3.0 / L 24.5 mm [50]

165429-1

Ø 4.0 / L 21.5 mm [50]

160214

Ø 4.0 / L 24.5 mm [50]

165536-1

6.3 x 0.8 x 21.5 mm [50]



156666-1

6.3 x 0.8 x 15.2 mm [100]



320565

M4 - L 22.1 mm [100]







321045

M6 - L 27.5 mm [100]



328998

M8 - L 28.1 mm [100]

-  Kabelverbinders geïsoleerd zonder versterkingshuls
-  Pre insulated terminal without anti vibration insert
-  Kabelverbinder isoliert ohne Verstärkungshülse
-  Cosse pré-isolée non renforcée

DIN 1.5 - 2.5 mm²
 AWG 16 - 14 mm²
 Nylon / Polyamide - DIN / ISO 46 245
 Max. Electrical Rating: 300 Volts - 105°C



9-165075-0

Ø 2.0 / L 20.0 mm [50]

165171

Ø 2.0 / L 23.0 mm [50]

322994

M3-W7.5 - L22.5mm [50]

34165

M3.5-W9.8-L22.5mm [50]

326741

M4-W7.5-L22.5 mm [50]

34166

M4-W9.8-L 22.5 mm [50]

160171

M5-W7.5-L 22.5 mm [50]



160213

M5-W9.8-L 22.5 mm [50]



34158

M3.5 - L 20.6 mm [50]



34160

M4 - L 20.6 mm [50]



34161

M4.5 - L 20.6 mm [50]



130102

M5 - L 23.0 mm [50]



34162

M6 - L 27.5mm [50]







34163

M8 - L 28.1mm [50]



160136

M10 - L 31.7mm [50]

-  Kabelverbinders geïsoleerd met versterkingshuls
-  Pre insulated terminal with anti vibration insert
-  Kabelverbinder isoliert mit Verstärkungshülse
-  Cosse pré-isolée renforcée

DIN 4.0 - 6.0 mm²
 AWG 12 - 10 mm²
 Nylon / Polyamide - DIN / ISO 46 245
 Max. Electrical Rating: 300 Volts - 105°C



141085-2

6.3 x 4.8 x 24.5 mm [50]

160314-2

6.3 x 4.8 x 25.0 mm [50]

160524-2

9.5 x 1.2 x 28.6 mm [50]

320570

6.3 x 0.8 x 31.3 mm [50]

35151

M12 - L 32.5 mm [50]

141085-2

6.3 x 4.8 x 24.5 mm [50]



165049

Ø 2.0 / L 27.5 mm [50]







160404-2

Ø 2.0 / L 33.5 mm [50]



KV.8092

6.3 x 0.8 x 16.9 mm [50]

-  Kabelverbinders geïsoleerd zonder versterkingshuls
-  Pre insulated terminal without anti vibration insert
-  Kabelverbinder isoliert ohne Verstärkungshülse
-  Cosse pré-isolée non renforcée

DIN 4.0 - 6.0 mm²
 AWG 12 - 10 mm²
 Nylon / Polyamide - DIN / ISO 46 245
 Max. Electrical Rating: 300 Volts - 105°C



34072

Ø 6.6 / L 27.5 mm [50]

165085

Ø 2.7 / L 27.5 mm [50]

34852

M3 - L 26.7 mm [50]

34853

M4 - L 26.7 mm [50]

160292

M5 - L 26.7 mm [50]

165035

6M6 - L 32.7 mm [50]

160296

M8 - L 34.9 mm [50]



160124

M10 - L 34.9 mm [50]



165015

M4-W8.0-L 26.7mm [50]



165017

M5-W9.0-L 26.7mm [50]



165019

M6-W12.0-L30.3mm [50]